


TOCHA TIG 17 (AR)




TECHNICAL DATA		
	TOCHA TIG 17	
	0,55 kg	1.22 lb
V PEAK	113	
	Argon	
	0,5 ÷ 2,4 mm	.020" ÷ 3/32"
X 35%	140A DC - 125A AC	


	CODE		Description	Quantity
4	TQ0002		insulator	10
5	TF0017		tig 17 torch head	1
6	TF0022		tig 17 flex torch head	1
7	BW0066		back cap 117 mm	10
7	EA0130		O-ring Ø 9x2 mm	10
8	TT0181		kit Ergotig single	1
9	TT0182		kit Ergotig dual	1
10	BW0303		reduction	1
10	BW0310		cable joint	1
10	EA0329		screw	50
10	TP0090		Ergotig handle	1
11	TH0046		cable assembly - 4 m / 12.5'	1
11	TH0047		cable assembly - 8 m / 25'	1
12	TH0005		power cable - 4 m / 12.5'	1
12	TH0006		power cable - 8 m / 25'	1
15	CX0077		TSK 50 - 1/4 G plug	1
15	CX0087		TSKM 25 - 1/4 G plug	1

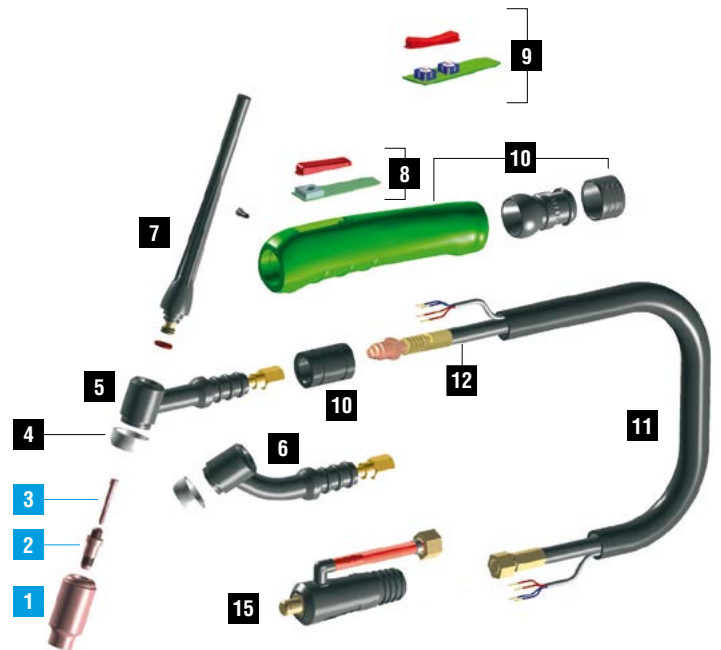

**WEAR PARTS
NOT INCLUDED**

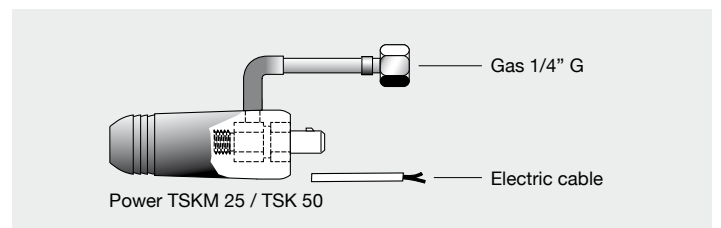

SERIES 17 - 18 - 26 - SUPER 18 WEAR PARTS

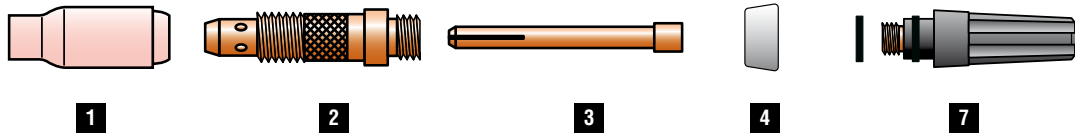

STANDARD

	CODE		Gr	Ø		↔	REF	
1	TC0002		4	6,4 mm	1/4"	47 mm	10N50	10
1	TC0003		5	8 mm	5/16"	47 mm	10N49	10
1	TC0004		6	9,8 mm	3/8"	47 mm	10N48	10
1	TC0005		7	11,2 mm	7/16"	47 mm	10N47	10
1	TC0006		8	12,7 mm	1/2"	47 mm	10N46	10
1	TC0007		10	15,7 mm	5/8"	47 mm	10N45	10
1	TC0008		12	19 mm	3/4"	47 mm	10N44	10
1	TC0091		5	8 mm	5/16"	76 mm	10N49L	10
1	TC0092		6	9,5 mm	3/8"	76 mm	10N48L	10
1	TC0093		7	11 mm		76 mm	10N47L	10
2	TE0001-05			0,5 mm	.020"	47 mm	10N29	10
2	TE0001-10			1,0 mm	.040"	47 mm	10N30	10
2	TE0001-16			1,6 mm	1/16"	47 mm	10N31	10
2	TE0001-20			2,0 mm	5/64"	47 mm	-	10
2	TE0001-24			2,4 mm	3/32"	47 mm	10N32	10
2	TE0001-32			3,2 mm	1/8"	47 mm	10N28	10
2	TE0001-40			4,0 mm	5/32"	47 mm	406488	10
2	TE0001-48			4,8 mm	3/16"	47 mm	30126	10

	CODE		Gr	Ø		↔	REF	
3	TD0001-05			0,5 mm	.020"	50 mm	10N21	10
3	TD0001-10			1,0 mm	.040"	50 mm	10N22	10
3	TD0001-16			1,6 mm	1/16"	50 mm	10N23	10
3	TD0001-20			2,0 mm	5/64"	50 mm	-	10
3	TD0001-24			2,4 mm	3/32"	50 mm	10N24	10
3	TD0001-32			3,2 mm	1/8"	50 mm	10N25	10
3	TD0001-40			4,0 mm	5/32"	50 mm	54N20	10
3	TD0001-48			4,8 mm	3/16"	50 mm	30028	10
4	TQ0002						18CG	10
4	TQ0008 *						-	10
7	BW0056					58 mm	57Y03	10
7	BW0066					117 mm	57Y02	10
7	BW0067					22,5 mm	57Y04	10
7	EA0130							10

* ONLY FOR 18 HC

GAS LENS


	CODE		Gr	Ø		↔	REF	
1	TC0031		4	6,4 mm	1/4"	42 mm	54N18	10
1	TC0032		5	8 mm	5/16"	42 mm	54N17	10
1	TC0033		6	9,8 mm	3/8"	42 mm	54N16	10
1	TC0034		7	11,2 mm	7/16"	42 mm	54N15	10
1	TC0035		8	12,7 mm	1/2"	42 mm	54N14	10
1	TC0036		11	19 mm	3/4"	42 mm	53N87	10
1	TC0037			17,2 mm		28,6 mm	54N19	10
1	TC0086		5	8 mm	5/16"	76 mm	54N17L	10
1	TC0087		6	9,5 mm	3/8"	76 mm	54N16L	10
1	TC0088		7	11 mm		76 mm	54N15L	10
2	TE0006-05			0,5 mm	.020"	50 mm	45V29	10
2	TE0006-10			1,0 mm	.040"	50 mm	45V24	10
2	TE0006-16			1,6 mm	1/16"	50 mm	45V25	10
2	TE0006-20			2,0 mm	5/64"	50 mm	-	10
2	TE0006-24			2,4 mm	3/32"	50 mm	45V26	10
2	TE0006-32			3,2 mm	1/8"	50 mm	45V27	10
2	TE0006-40			4,0 mm	5/32"	50 mm	45V28	10
3	TD0022-10			1,0 mm	.040"	52 mm	-	10
3	TD0022-16			1,6 mm	1/16"	52 mm	-	10
3	TD0022-24			2,4 mm	3/32"	52 mm	-	10
3	TD0022-32			3,2 mm	1/8"	52 mm	-	10
3	TD0022-40			4,0 mm	5/32"	52 mm	-	10
4	TQ0003						54N01	10
7	BW0056					58 mm	57Y03	10
7	BW0066					117 mm	57Y02	10
7	BW0067					22,5 mm	57Y04	10
7	EA0130							10

GAS LENS XL (JUMBO)

	CODE		Gr	Ø		↔	REF	
1	TC0118		8	12,7 mm	1/2"	48 mm	57N74	10
1	TC0119		10	15,7 mm	5/8"	48 mm	53N88	10
1	TC0120		12	19,5 mm	3/4"	48 mm	53N87	10
2	TE0009-16			1,6 mm	1/16"	51 mm	45V16	2
2	TE0009-24			2,4 mm	3/32"	51 mm	45V64	2
2	TE0009-32			3,2 mm	1/8"	51 mm	995795	2
2	TE0009-40			4,0 mm	5/32"	51 mm	45V63	2
3	TD0001-05			0,5 mm	.020"	50 mm	10N21	10
3	TD0001-10			1,0 mm	.040"	50 mm	10N22	10
3	TD0001-16			1,6 mm	1/16"	50 mm	10N23	10
3	TD0001-20			2,0 mm	5/64"	50 mm	-	10
3	TD0001-24			2,4 mm	3/32"	50 mm	10N24	10
3	TD0001-32			3,2 mm	1/8"	50 mm	10N25	10
3	TD0001-40			4,0 mm	5/32"	50 mm	54N20	10
3	TD0001-48			4,8 mm	3/16"	50 mm	30028	10
4	TQ0027						54N63	10
7	BW0056					58 mm	57Y03	10
7	BW0066					117 mm	57Y02	10
7	BW0067					22,5 mm	57Y04	10
7	EA0130							10


Gas protection flow is usually guttered by a STANDARD ceramic nozzle (picture 1). Such flow is affected by turbulences of head torch which are caused by the inlet pressure. In order to assure a uniform gas distribution, above all in stainless steel, titanium and aluminium alloys welding, we suggest the use of GAS LENS spare parts. The electrode holder equipped with a gas lens net, uniformes the flow (picture 2) and aid to save the protection gas. Where permitted by external dimensions, it is recommended the JUMBO version which increases the protected surface with advantage for welding quality (picture 3).

STANDARD




picture 1

GAS LENS



picture 2

JUMBO




picture 3

SERIES 17 - 18 - 26 - SUPER 18 STUBBY WEAR PARTS



1




2



3



4



7

STUBBY

	CODE		Gr	Ø		REF	
1	TC0012		4	6,4 mm	1/4"	30 mm	13N08
1	TC0013		5	8 mm	5/16"	30 mm	13N09
1	TC0014		6	9,8 mm	3/8"	30 mm	13N10
1	TC0015		7	11,2 mm	7/16"	30 mm	13N11
1	TC0016		8	12,7 mm	1/2"	30 mm	13N12
1	TC0017		10	15,7 mm	5/8"	30 mm	13N13
1	TC0096		4	6,5 mm	1/4"	48 mm	796F71
1	TC0097		5	8 mm	5/16"	48 mm	796F72
1	TC0098		6	9,5 mm	3/8"	48 mm	796F73
1	TC0101		4	6,5 mm	1/4"	63 mm	796F75
1	TC0102		5	8 mm	5/16"	63 mm	796F76
1	TC0103		4	6,5 mm	1/4"	89 mm	796F79
2	TE0002-00			1,0 mm	.040"	24,5 mm	17CB20
3	TD0002-10			1,0 mm	.040"	29 mm	10N22S
3	TD0002-16			1,6 mm	1/16"	29 mm	10N23S
3	TD0002-20			2,0 mm		29 mm	
3	TD0002-24			2,4 mm	3/32"	29 mm	10N24S
3	TD0002-32			3,2 mm	1/8"	29 mm	10N25S
4	TQ0002						18CG
4	TQ0008 *						-
7	BW0056					58 mm	57Y03
7	BW0066					117 mm	57Y02
7	BW0067					22,5 mm	57Y04
7	EA0130						10

* ONLY FOR 18 HC

STUBBY GAS LENS

	CODE		Gr	Ø		REF	
1	TC0041		4	6,4 mm	1/4"	25,5 mm	53N58
1	TC0042		5	8 mm	5/16"	25,5 mm	53N59
1	TC0043		6	9,8 mm	3/8"	25,5 mm	53N60
1	TC0044		7	11,2 mm	7/16"	25,5 mm	53N61
1	TC0045		8	12,7 mm	1/2"	25,5 mm	53N61S
2	TE0095-16			1,6 mm	1/16"	29 mm	-
2	TE0095-20			2,0 mm	5/64"	29 mm	-
2	TE0095-24			2,4 mm	3/32"	29 mm	-
2	TE0095-32		3,2 mm	1/8"	29 mm	-	
3	TD0095-16			1,6 mm	1/16"	30,7 mm	-
3	TD0095-20			2,0 mm	5/64"	30,7 mm	-
3	TD0095-24			2,4 mm	3/32"	30,7 mm	-
3	TD0095-32			3,2 mm	1/8"	30,7 mm	-
4	TQ0095						18CG20
4	TQ0096 *						10
7	BW0056					58 mm	57Y03
7	BW0066					117 mm	57Y02
7	BW0067					22,5 mm	57Y04
7	EA0130						10

* ONLY FOR 18 HC

STUBBY GAS LENS (Cu)

	CODE		Gr	Ø		REF	
1	TC0041		4	6,4 mm	1/4"	25,5 mm	53N58
1	TC0042		5	8 mm	5/16"	25,5 mm	53N59
1	TC0043		6	9,8 mm	3/8"	25,5 mm	53N60
1	TC0044		7	11,2 mm	7/16"	25,5 mm	53N61
1	TC0045		8	12,7 mm	1/2"	25,5 mm	53N61S
2	TE0096-16			1,6 mm	1/16"	30,6 mm	-
2	TE0096-20			2,0 mm	5/64"	30,6 mm	-
2	TE0096-24			2,4 mm	3/32"	30,6 mm	-
2	TE0096-32		3,2 mm	1/8"	30,6 mm	-	
3	TD0096-16			1,6 mm	1/16"	33 mm	-
3	TD0096-20			2,0 mm	5/64"	33 mm	-
3	TD0096-24			2,4 mm	3/32"	33 mm	-
3	TD0096-32			3,2 mm	1/8"	33 mm	-
4	TQ0095						18CG20
4	TQ0096 *						10
7	BW0056					58 mm	57Y03
7	BW0066					117 mm	57Y02
7	BW0067					22,5 mm	57Y04
7	EA0130						10

* ONLY FOR 18 HC

The Stubby collets allow the use of the small nozzles of the 9/20 series on the 17/18/26 torch bodies.

